



Extended Characterization Data GTLP8T306

DC Characteristics


GTLP Port I_{OL} Curve with 25Ω Load Line
GTLP8T306

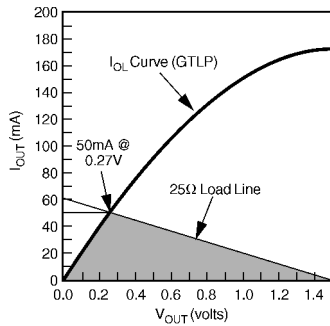


TTL Port - I_{IN} Curve
GTLP8T306

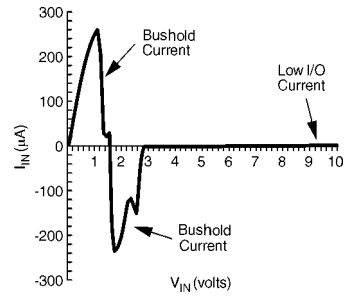

Port - I_{OFF} Curve
GTLP8T306

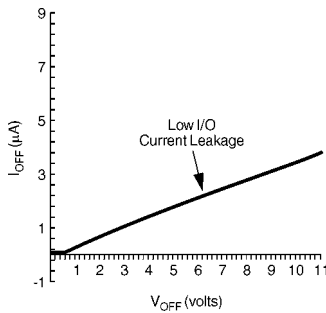


Port - I_{PU} Curve
GTLP8T306

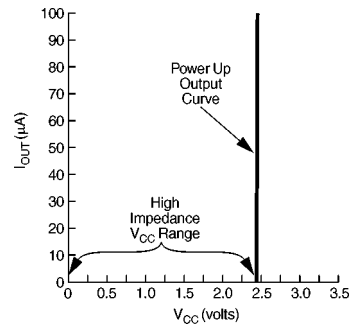


AC Characteristics


**TTL to GTLP Propagation Delay (30 pF)
GTLP8T306**

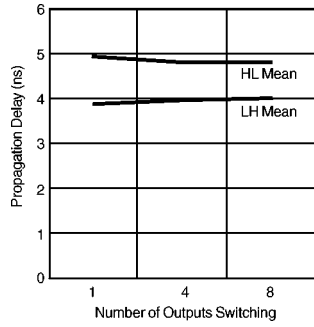


**GTLP to TTL Propagation Delay (50 pF)
GTLP8T306**

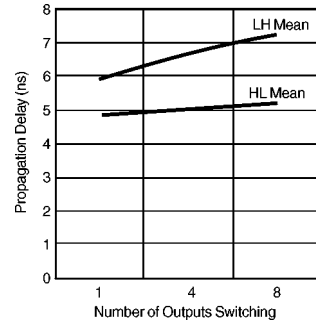


**TTL to GTLP Output Edge Rates
GTLP8T306**

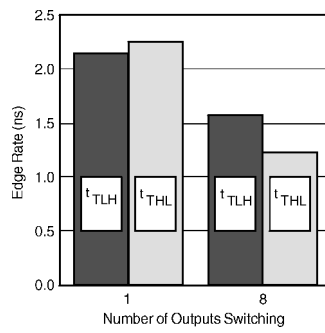


**GTLP to TTL Output Edge Rates
GTLP8T306**

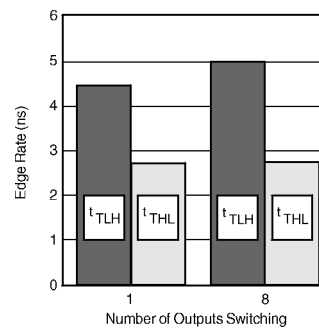

**GTLP to TTL Propagation Delays
(Single Output Switching)
GTLP8T306**

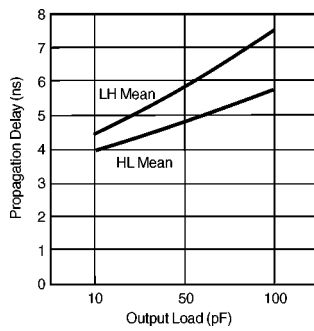

**GTLP to TTL Output Edge Rates
(Single Output Switching)
GTLP8T306**

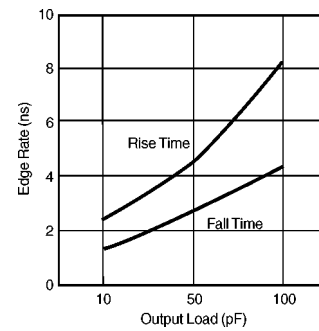

Fairchild does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and Fairchild reserves the right at any time without notice to change said circuitry and specifications.

LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

www.fairchildsemi.com