TO-220F-5L Tube Packing Data

TO-220F-5L Tube Packing Configuration: Figure 1.0

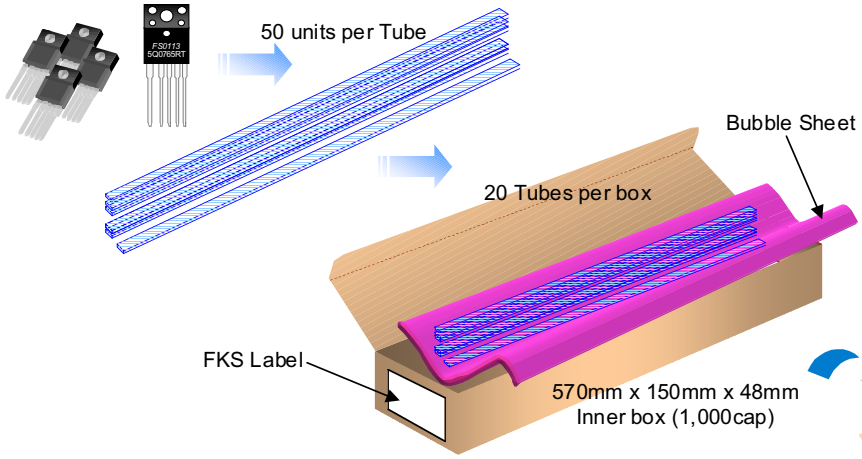

Packaging Description:

TO-220F-5L parts are shipped in tube. The tube is made of PVC plastic treated with anti-static agent.These tubes in standard option are placed inside a dissipative plastic bubble sheet, barcode labeled, and placed inside a box made of recyclable corrugated paper. One box contains twenty tubes maximum (see fig. 1.0). And one or several of these boxes are placed inside a labeled shipping box which comes in different sizes depending on the number of parts shipped. The units in this option are placed inside a small box laid with anti-static bubble sheet. These larger boxes then will be placed finally inside a labeled shipping box which still comes in different sizes depending on the number of units shipped.

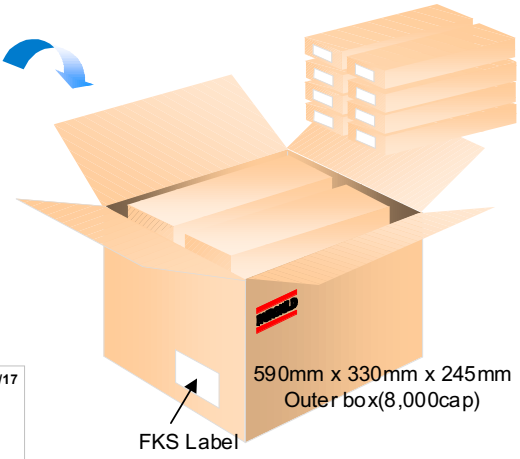

TO-220F-5L Packaging Information: Figure 2.0

TO-220F-5L Packaging Information	
Packaging Option	Standard (no flow code)
Packaging type	Rail/Tube
Qty per Tube/ Inner Box	50
Inner Box Dimension (mm)	570x150x48
Max qty per Box	1,000
Outer Box Dimension (mm)	590x330x245
Max qty per Box	8,000
Weight per unit (gm)	2.2369
Note/Comments	

Inner Box Barcode Label Sample

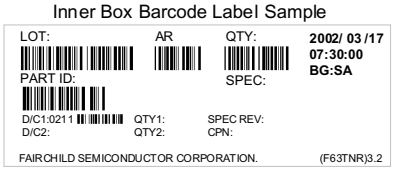

Outer Box Barcode Label Sample

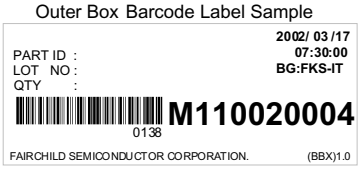

TO-220F-5L Tube Configuration: Figure 3.0

Note: All dimensions are in mm

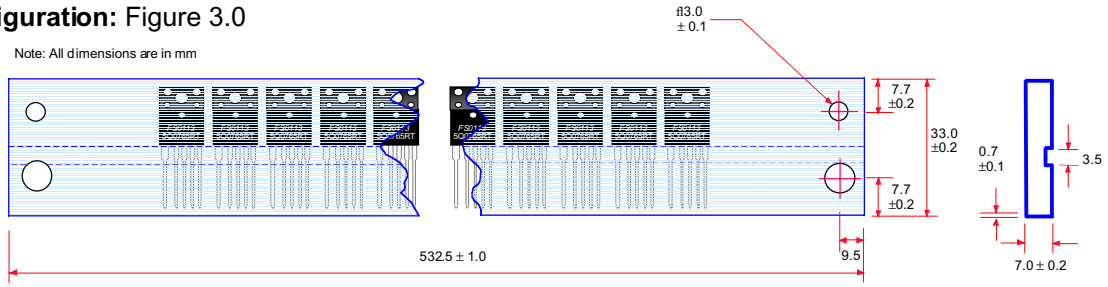

©2002 Fairchild Semiconductor Corporation