


TO-3PF-5L Tube Packing Data



TO-3PF-5L Tube Packing Configuration: Figure 1.0

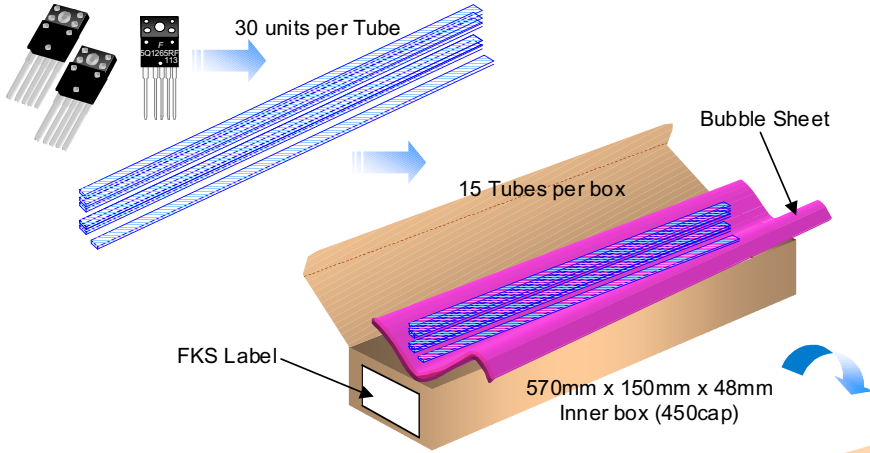

Packaging Description:
 TO-3PF-5L parts are shipped in tube. The tube is made of PVC plastic treated with anti-static agent. These tubes in standard option are placed inside a dissipative plastic bubble sheet, barcode labeled, and placed inside a box made of recyclable corrugated paper. One box contains fifteen tubes maximum (see fig. 1.0). And one or several of these boxes are placed inside a labeled shipping box which comes in different sizes depending on the number of parts shipped. The units in this option are placed inside a small box laid with anti-static bubble sheet. These larger boxes then will be placed finally inside a labeled shipping box which still comes in different sizes depending on the number of units shipped.

TO-3PF-5L Packaging Information: Figure 2.0


TO-3PF-5L Packaging Information	
Packaging Option	Standard (no flow code)
Packaging type	Rail/Tube
Qty per Tube/ Inner Box	30
Inner Box Dimension (mm)	570x150x48
Max qty per Outer Box	450
Outer Box Dimension (mm)	590x330x245
Max qty per Box	3,600
Weight per unit (gm)	5.9188
Note/Comments	

Inner Box Barcode Label Sample

LOT: AR QTY: 2002/ 03 /17
 07:30:00
 PART ID: SPEC: BG:SA
 DIC1:0211 QTY1: SPEC REV: CPN:
 D/C2: QTY2:
 FAIRCHILD SEMICONDUCTOR CORPORATION. (F63TNR)3.2

Outer Box Barcode Label Sample

2002/ 03 /17
 PART ID : 07:30:00
 LOT NO : BG:FKS-IT
 QTY :
 M110020004
 0138
 FAIRCHILD SEMICONDUCTOR CORPORATION. (BBX)1.0

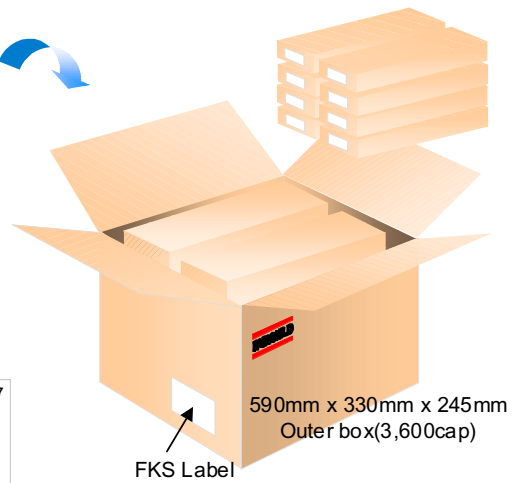

TO-3PF-5L Tube Configuration: Figure 3.0

Note: All dimensions are in mm

