


HexDIP

4 PIN DUAL-IN-LINE PLASTIC PACKAGE

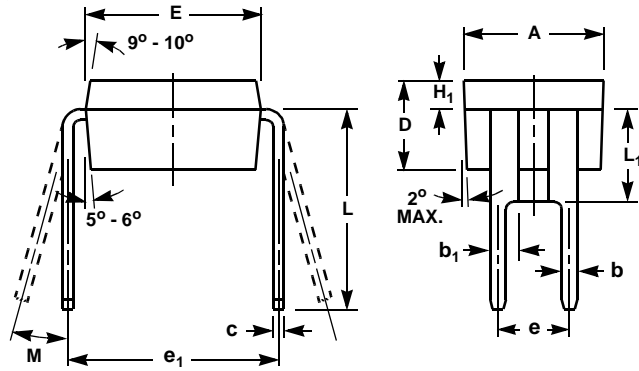

SYMBOL	INCHES		MILLIMETERS		NOTES
	MIN	MAX	MIN	MAX	
A	0.19	0.198	4.93	5.02	-
b	0.02	0.024	0.51	0.60	1, 2
b ₁	0.03	0.045	0.89	1.14	1, 2
c	0.01	0.017	0.34	0.43	1, 2
D	0.12	0.134	3.21	3.40	-
E	0.24	0.248	6.15	6.29	-
e	0.100 BSC		2.54 BS		3
e ₁	0.30	-	7.62	-	3
H ₁	0.03	0.042	0.97	1.06	-
L	0.26	0.296	6.76	7.51	-
L ₁	0.12	0.136	3.21	3.45	-
M	0°	10°	0°	10°	-

NOTES:

1. Lead dimension (without solder).
2. Add typically 0.0006 inches (0.015mm) for solder coating.
3. Position of lead to be measured 0.100 inches (2.54mm) from bottom of dimension D.
4. Controlling dimension: Inch.
5. Revision 2 dated 10-94.