MLP 2x2 (MicroFET 2x2) Tape Information

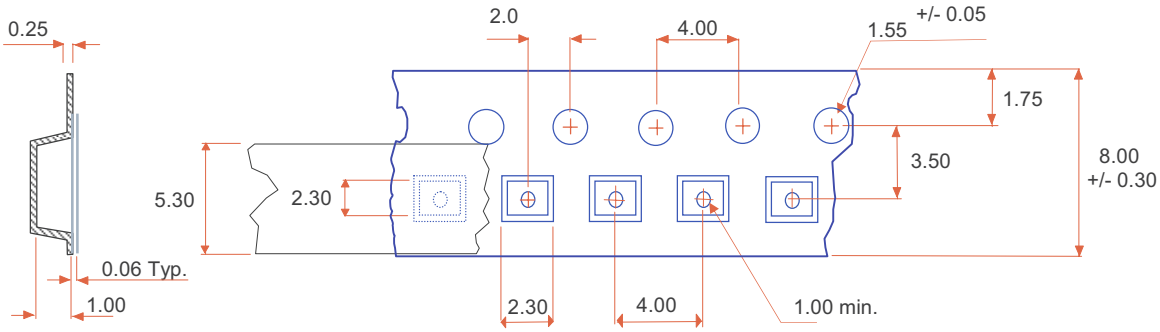

User Direction of Feed

NOTES :

1. 10 sprocket hole pitch cumulative tolerance ± 0.2 mm.
2. Camber not to exceed 1mm in 100mm.
3. Material : Black conductive or black static dissipative.
4. It should be measured from: a. sprocket hole to pocket center
   b. sprocket hole to pocket hole
5. All sizes in mm unless specified.
6. Tolerances will be ± 0.1 mm unless specified.

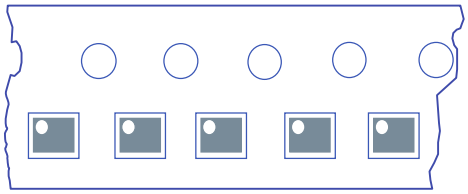

Orientation of Unit in Pocket

©2006 Fairchild Semiconductor Corporation