


TSSOP-(8 Ids) Tape and Reel Data



TSSOP-(8 Ids) Packaging Configuration: Figure 1.0

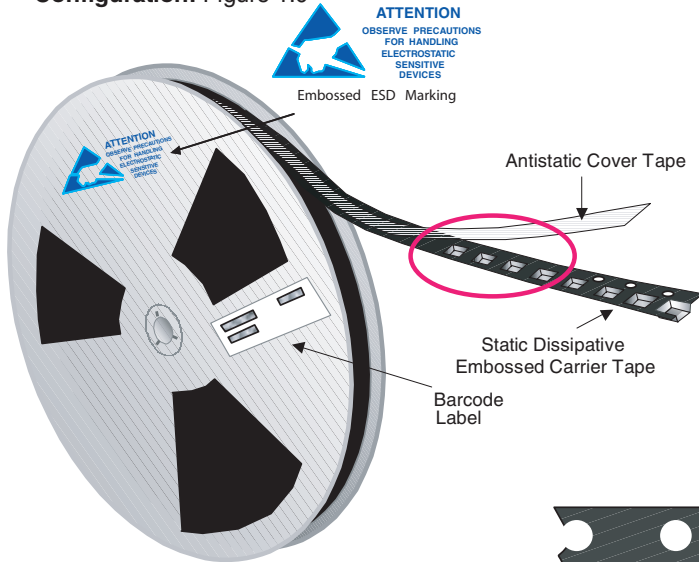


Packaging Description:

TSSOP-(8 Ids) parts are shipped in normally tape. The carrier tape is made from a dissipative (carbon filled) polycarbonate resin. The cover tape is a multilayer film (Heat Activated Adhesive in nature) primarily composed of polyester film, adhesive layer, sealant, and anti-static sprayed agent. These reeled parts in standard option are shipped with 2,500 units per 13" or 330mm diameter reel. The reels are dark blue in color and is made of polystyrene plastic (anti-static coated). This and the other packing option are described in the Packaging Information table.



These full reels are individually barcode labeled and placed inside a standard intermediate box (illustrated in figure 1.0) made of recyclable corrugated brown paper. One box contains two reels. These boxes are placed inside a barcode labeled shipping box which comes in different sizes depending on the number of parts shipped.

TSSOP-(8 Ids) Packaging Information		
Packaging Option	Standard (no flow code)	F064
Packaging type	TNR	TNR
Qty per Reel/Tube/Bag	2,500	2,500
Reel Size	13" Dia	13" Dia
Box Dimension (mm)	355x333X40	355x333X40
Max qty per Box	5,000	5,000
Weight per unit (gm)	0.020	0.020
Weight per Reel (kg)	0.426	0.426
Carrier Tape Width	12mm	16mm
Note/Comments	-	-

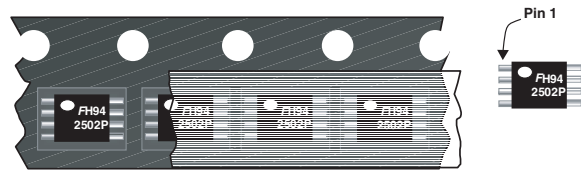


TSSOP-(8 Ids) Unit Orientation

Barcode Label sample

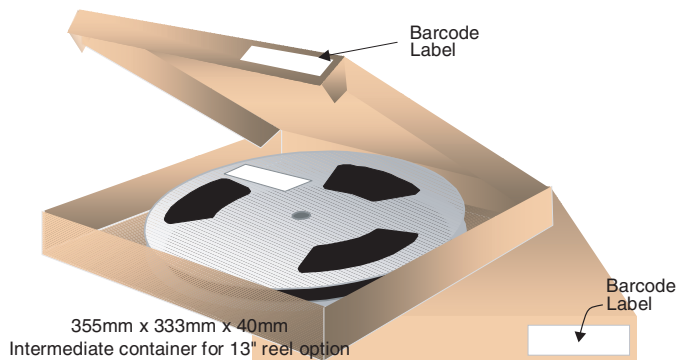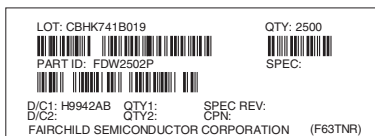


TSSOP-(8 Ids) Tape Leader and Trailer Configuration: Figure 2.0

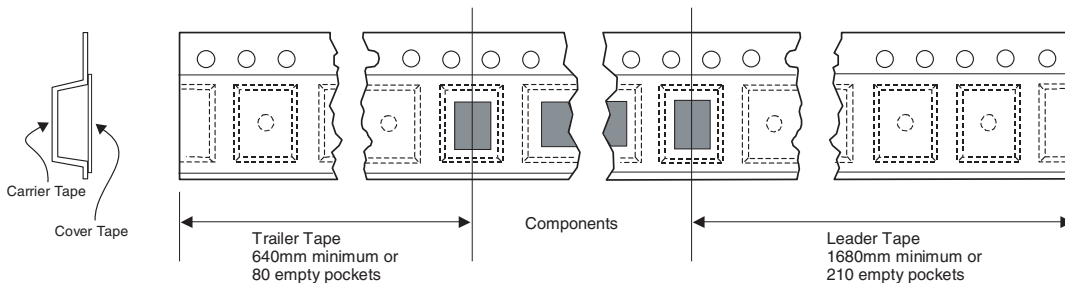

TSSOP-(8 Ids) Tape and Reel Data, continued


TSSOP-(8 Ids) Embossed Carrier Tape Configuration: Figure 1.0

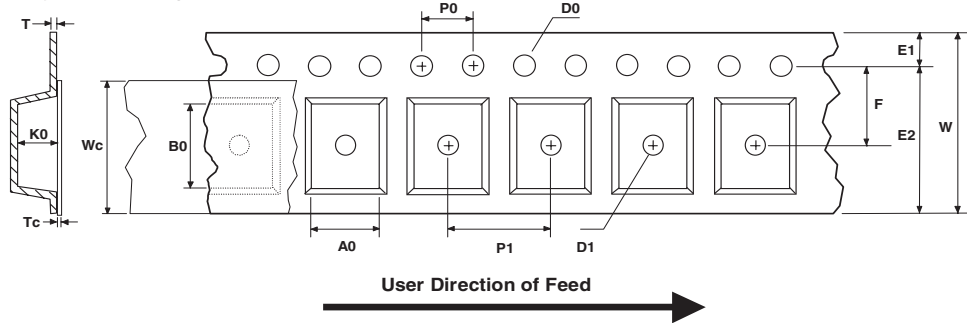


Dimensions are in millimeter

Pkg type	A0	B0	W	D0	D1	E1	E2	F	P1	P0	K0	T	Wc	Tc
TSSOP-(8 Ids) (12mm)	6.80 +/-0.10	3.40 +/-0.10	12.0 +/-0.3	1.55 +/-0.05	1.50 min	1.75 +/-0.10	10.25 min	5.50 +/-0.05	8.0 +/-0.1	4.0 +/-0.1	1.60 +/-0.10	0.30 +/-0.05	9.2 +/-0.3	0.06 +/-0.02
TSSOP-(8 Ids) (16mm)	6.80 +/-0.10	3.40 +/-0.10	16.0 +/-0.3	1.55 +/-0.05	1.50 min	1.75 +/-0.10	14.25 min	7.50 +/-0.05	8.0 +/-0.1	4.0 +/-0.1	1.60 +/-0.10	0.30 +/-0.05	13.0 +/-0.3	0.06 +/-0.02

Notes: A0, B0, and K0 dimensions are determined with respect to the EIA/Jedec RS-481 rotational and lateral movement requirements (see sketches A, B, and C).

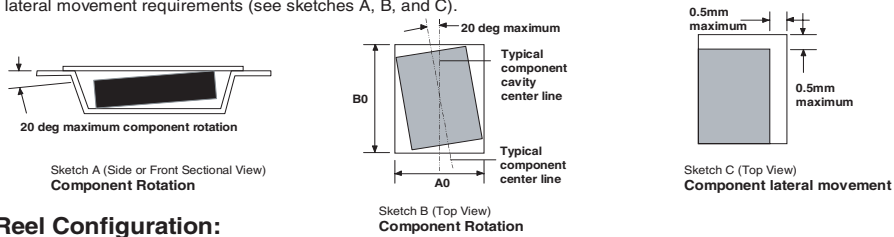

TSSOP-(8 Ids) Reel Configuration: Figure 2.0

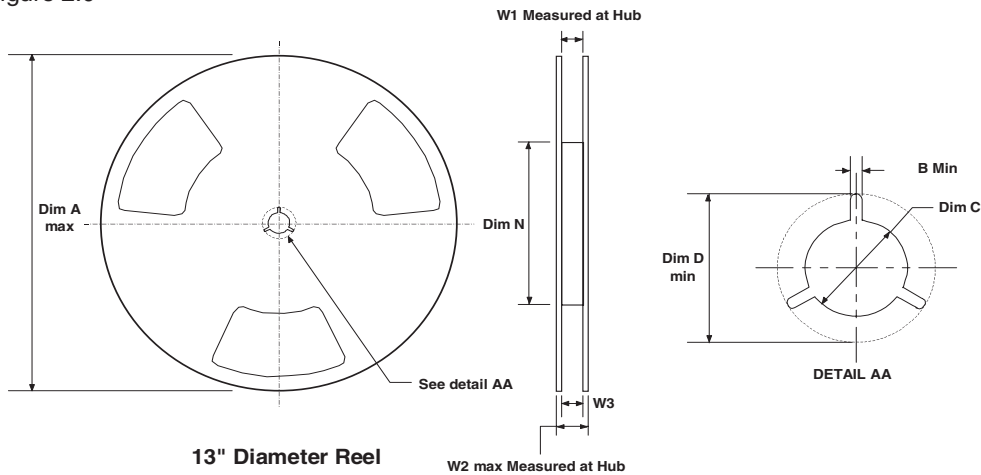

Dimensions are in inches and millimeters

Tape Size	Reel Option	Dim A	Dim B	Dim C	Dim D	Dim N	Dim W1	Dim W2	Dim W3 (LSL-USL)
12mm	13" Dia	13.00 330	0.059 1.5	512 +0.020/-0.008 13+0.5/-0.2	0.795 20.2	7.00 178	0.488 +0.078/-0.000 12.4 +2/0	0.724 18.4	0.469 - 0.606 11.9 - 15.4
16mm	13" Dia	13.00 330	0.059 1.5	512 +0.020/-0.008 13+0.5/-0.2	0.795 20.2	4.00 100	0.646 + 0.078/-0.000 16.4 +2/0	0.882 22.4	0.626 - 0.764 15.9 - 19.4