



# TAPE AND REEL SPECIFICATIONS SURFACE MOUNT INFRARED LIGHT EMITTING DIODE




## 12 mm TAPE and REEL

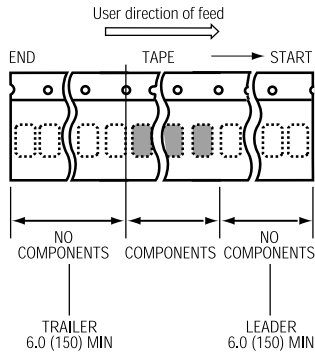



Dimensions per ANSI/EIA Standard RS-481  
All dimensions are in millimeters

A	7.08 (180) 6.92 (176)	DIA.
C	0.73 (18.5) 0.69 (17.5)	
N	3.19 (81) 3.11 (79)	
T	.45 (11.5) .33 (8.5)	

Thickness of top cover tape  
.004 (.10) MAX

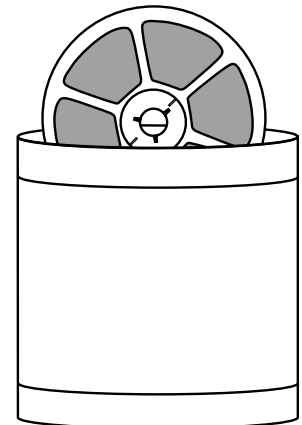


Components are packed in a heat-sealed, moisture-proof aluminum bag.

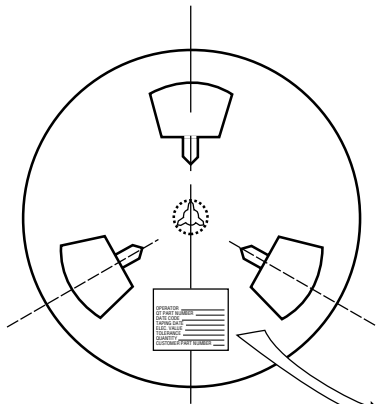

OPERATOR \_\_\_\_\_  
 QT PART NUMBER \_\_\_\_\_  
 DATE CODE \_\_\_\_\_  
 TAPING DATE \_\_\_\_\_  
 ELEC. VALUE \_\_\_\_\_  
 TOLERANCE \_\_\_\_\_  
 QUANTITY \_\_\_\_\_  
 CUSTOMER PART NUMBER \_\_\_\_\_

## TAPE DIMENSIONS

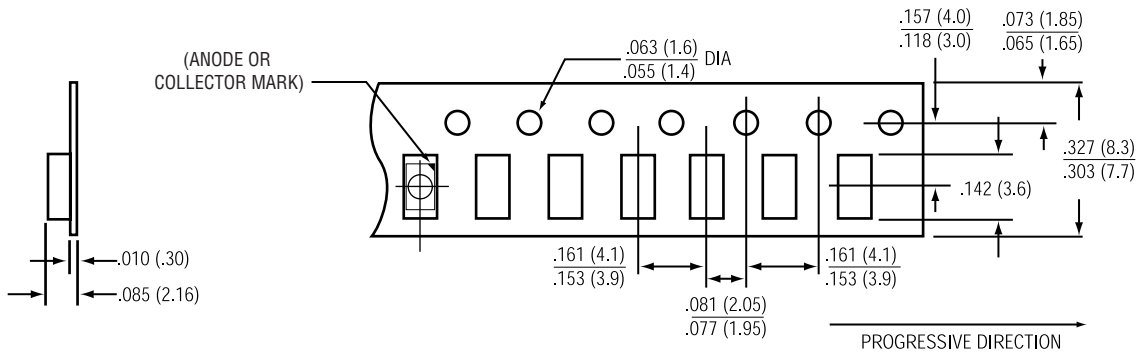

### Notes (Applies to all packaging on this page.)

1. All dimensions on this page are in inches (mm).
2. Quantity/Reel: 2,000.
3. When ordering tape and reel parts, add suffix "TR" to part number.