


TAPE AND REEL SPECIFICATIONS SIDELOOKER PACKAGE

Ordering Information

To order Infrared (IR) Products on tape and reel or ammopack, include the appropriate standard product part number and suffix code to specify configuration and optional features.

QSEXXE6R0

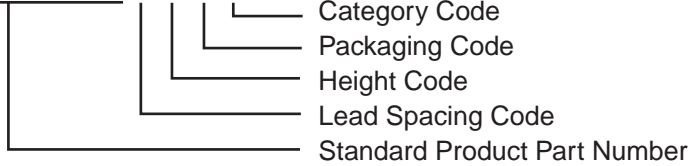

Category Code

The category code for Infrared (IR) Products is always "0".

Packaging Code

Code	Packaging	Quantity
R	Reel	2,000
A	Ammopack	1,500

Height Code

Code	Height (H)	Note
1	16.5 mm	5
2	17.5 mm	5
3	18.5 mm	5
4	20.5 mm	5
5	22.5 mm	5
6	24.5 mm	5
Tolerance = ± 1mm		

Lead Spacing Code

Code	Package
E	2.54mm
Tolerance	+0.6 / -0.1mm

Notes

- Automatic PCB assembly for most T-1 and T-1 3/4 leads with radial insertion machines.
- Meets ANSI/EIA standard RS-468.
- The maximum number of consecutive missing lamps is three.
- Standard 0.10 (2.54) lead spacing.
- Height (H) is measured from center of tape to base of flange. See H dimension in the tape dimensions section.