


# TAPE AND REEL SPECIFICATIONS SIDELOOKER PACKAGE

## Ordering Information

To order Infrared (IR) Products on tape and reel or ammopack, include the appropriate standard product part number and suffix code to specify configuration and optional features.

**QSEXXE6R0**

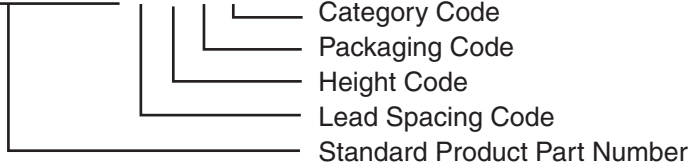

### Category Code

The category code for Infrared (IR) Products is always "0".

### Packaging Code

Code	Packaging	Quantity
R	Reel	2,000
A	Ammopack	1,500

### Height Code

Code	Height (H)	Note
1	16.5 mm	5
2	17.5 mm	5
3	18.5 mm	5
4	20.5 mm	5
5	22.5 mm	5
6	24.5 mm	5
Tolerance = ± 1mm		

### Lead Spacing Code E

Dimensions	Tolerance
2.54mm	+0.6 / -0.1mm

## Notes

1. Automatic PCB assembly for most T-1 and T-1 3/4 leads with radial insertion machines.
2. Meets ANSI/EIA standard RS-468.
3. The maximum number of consecutive missing lamps is three.
4. Standard 0.10 (2.54) lead spacing.
5. Height (H) is measured from center of tape to base of flange. See H dimension in the tape dimensions section.