


DO-15 Tape and Reel Data




DO-15 Packaging Configuration: Figure 1.0

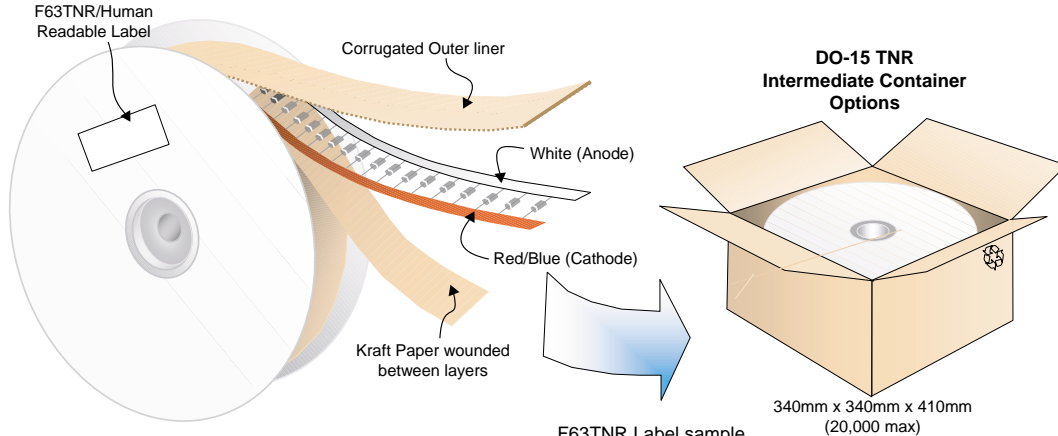

DO-15 Packaging Information Table : Figure 2.0

DO-15 Packaging Information	
Packaging Option	Under package code P2
Packaging type	TNR
Qty per Reel/Tube/Bag	4,000
Reel Size (inch diameter)	13
Inside Tape Spacing (mm)	52
Int Box Dimension (mm)	340x340x410
Max qty per Box	20,000
Weight per unit (gm)	0.400
Weight per Reel (kg)	1.500
Note/Comments	


F63TNR Label sample

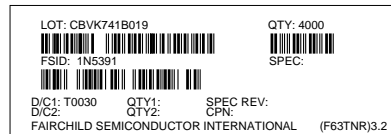

Human Readable Label sample



DO-15 Taping Dimension: Figure 5.0

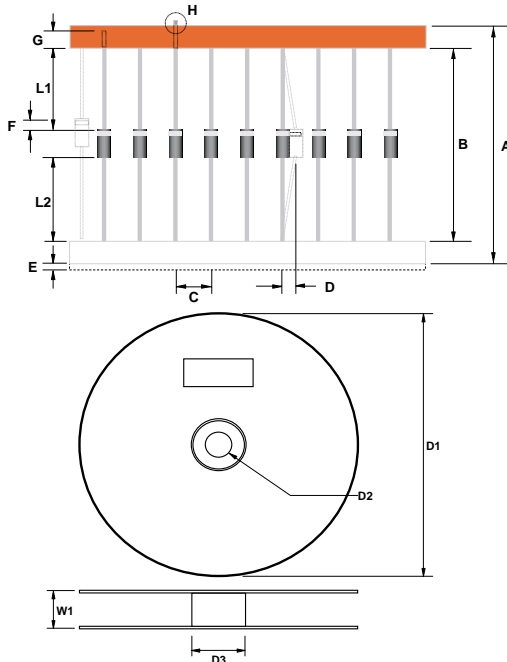

TAPING DIMENSIONS

	INCH	MM	MILS	NOTES
A	2.520 +0.066/ -0.027	64.00 +1.69/ -0.69	2519 +66.5/ -27.0	Overall width
	1.496 +0.059/ -0.039	38.00 +1.5 -1.0	1496 +59 -39	
B	2.047±0.027	52 ±0.69	2047±27	Inside Tape Spacing
C	0.200 ±0.0157	5.08 ±0.40	200 ±15.7	Component Pitch
D	0.047(max)	1.2(max)	47(max)	Component Misalignment
E	0.022(max)	0.55(max)	22(max)	Tape Mismatch
F	0.027(max)	±0.69	±27	Units in line w/ one another
G	0.126(min)	3.2(min)	126(min)	Lead amount between tapes
H	0	0	0	Lead amount beyond tapes
L1-L2	±0.027	±0.69	±27	Delta between two leads

REEL DIMENSIONS

ITEM DESCRIPTION	SYMBOL	MINIMUM	MAXIMUM
Reel Diameter	D1	13.875	14.125
Arbor Hole Diameter (Standard)	D2	1.245	1.255
Core Diameter	D3	3.190	3.310
Flange to Flange Outer Width	W1		3.400

Note: All Dimensions are in inches